

NICKEL PLATED 2-BOLT FLANGES





Seal Options



Black Oxide bearing inserts: BUCNPFL.

» Overview of corrosion resistant products – pg. 47-48

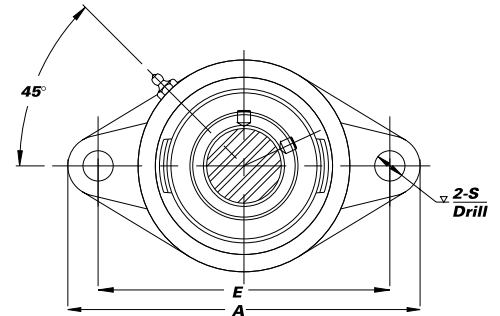

Unit No.	Shaft Dia.		Dimensions (in.) (mm)										Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)
	d	A	E	I	G	L	S	B	Z	Bi	N	M				
BUCNPFL 201-8 202-10	1/2 5/8	4 13/32 112	3 76.2	43/64 17	7/16 11	3 1/32 25	25/64 10	23/8 60	1 5/16 33.3	1.0236 26.0	0.3937 10.0	0.6299 16.0	5/16	BUCW 201-8 202-10	NPFT 203	0.9
BUCNPFL 204-12 204	3/4 20	4 7/16 113	3 17/32 89.7	19/32 15	7/16 11	2 5/32 25	25/64 10	23/8 60	1 5/16 33.3	1.2205 31.0	0.5000 12.7	0.7205 18.3	5/16	BUC 204-12 204	NPFL 204	1.0
BUCNPFL 205-14 205 205-16	7/8 25 1	5 1/8 130	3 57/64 98.8	5/8 16	1/2 13	1 1/16 27	15/32 11.9	2 11/16 68	1 15/32 37.3	1.3386 34.0	0.5630 14.3	0.7756 19.7	3/8	BUC 205-14 205 205-16	NPFL 205	1.5
BUCNPFL 206-18 206 206-19 206-20	1 1/8 30 1 3/16 1 1/4 S	5 13/16 148	4 19/32 116.7	45/64 18	1/2 13	1 7/32 31	15/32 11.9	3 5/32 80	1 19/32 40.5	1.5000 38.1	0.6260 15.9	0.8740 22.2	3/8	BUC 206-18 206 206-19 206-20	NPFL 206	2.2
BUCNPFL 207-20 207-22 207 207-23	1 1/4 1 3/8 35 1 7/16	6 11/32 161	5 1/8 130.2	3/4 19	9/16 14	1 11/32 34	39/64 13	3 17/32 90	1 3/4 44.5	1.6890 42.9	0.6890 17.5	1.0000 25.4	7/16	BUC 207-20 207-22 207 207-23	NPFL 207	2.9
BUCNPFL 208-24 208	1 1/2 40	6 7/8 175	5 21/32 143.7	53/64 21	9/16 14	1 13/32 36	39/64 13	3 15/16 100	2 50.8	1.9370 49.2	0.7480 19.0	1.1890 30.2	7/16	BUC 208-24 208	NPFL 208	3.5
BUCNPFL 209-26 209-27 209-28 209	1 5/8 1 11/16 1 3/4 45	7 13/32 188	5 27/32 148.4	55/64 22	19/32 15	1 1/2 38	19/32 15	4 1/4 108	2 1/16 52.4	1.9370 49.2	0.7480 19.0	1.1890 30.2	1/2	BUC 209-26 209-27 209-28 209	NPFL 209	4.4
BUCNPFL 210-30 210-31 210 210-32	1 7/8 1 15/16 50 2 S	7 3/4 197	6 3/16 157	55/64 22	19/32 15	1 9/16 40	19/32 15	4 17/32 115	2 5/32 54.8	2.0315 51.6	0.7480 19.0	1.2835 32.6	1/2	BUC 210-30 210-31 210 210-32	NPFL 210	5.1
BUCNPFL 211-32 211 211-35	2 55 2 3/16	8 13/16 224	7 1/4 184	63/64 25	23/32 18	1 11/16 43	41/64 16.3	5 1/8 130	2 5/16 58.7	2.1890 55.6	0.8740 22.2	1.3150 33.4	9/16	BUC 211-32 211 211-35	NPFL 211	7.3
BUCNPFL 212-36 212 212-39	2 1/4 60 2 7/16	9 27/32 250	7 15/16 201.6	1 9/64 29	23/32 18	1 7/8 48	41/64 16.3	5 1/2 140	2 23/32 69.1	2.5630 65.1	1.0000 25.4	1.5630 39.7	9/16	BUC 212-36 212 212-39	NPFL 212	9.5