

NANFL 2-BOLT FLANGE UNITS




Seal Options



*Call for speed tolerances and available sizes

Eccentric locking lock.

- » Cast iron housing
- » Wide inner race bearing

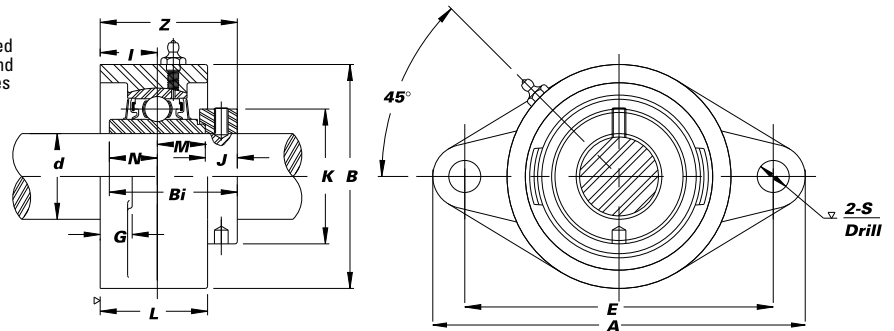

Unit No.	Shaft Dia.		Dimensions (in.) (mm)													Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)
	d	(in.) (mm)	A	E	I	G	L	S	B	Z	Bi	N	M	J	K				
NANFL 201	12																NAW201		
201-8	1/2	15	4 13/32	3	43/64	7/16	31/32	25/64	23/8	1 19/32	1.4685	0.5472	0.5472	0.3740	1.1260	5/16	201-8	FT 203	1.2
202			112	76.2	17	11	25	10	60	40.5	37.3	13.9	13.9	9.5	28.6		202		
202-10	5/8	17															202-10		
203																	203		
NANFL 204-12	3/4	20	4 7/16	3 17/32	3/4	7/16	1 5/32	25/64	23/8	1 25/32	1.7126	0.6693	0.6693	0.3740	1.3110	5/16	NA 204-12	NFL 204	1.3
204			113	89.7	19	11	29.5	10	60	45.5	43.5	17.0	17.0	9.5	33.3		204		
NANFL 205-14	7/8	25	5 1/8	3 57/64	25/32	1/2	1 7/32	15/32	2 11/16	1 27/32	1.7441	0.6850	0.6850	0.3740	1.5000	3/8	NA 205-14	NFL 205	2.0
205-15	15/16																205-15		
205			130	98.8	20	13	31	11.9	68	46.7	44.3	17.4	17.4	9.5	38.1		205		
205-16	1																205-16		
NANFL 206-17	1 1/16	30	5 13/16	4 19/32	53/64	1/2	1 11/32	15/32	3 5/32	2	1.9016	0.7165	0.7165	0.4685	1.7520	3/8	NA 206-17	NFL 206	2.5
206-18	1 1/8																206-18		
206			148	116.7	21	13	34	11.9	80	51.1	48.3	18.2	18.2	11.9	44.5		206		
206-19	1 3/16																206-19		
206-20	1 1/4 S																206-20		
NANFL 207-20	1 1/4	35	6 11/32	5 1/8	27/32	9/16	1 7/16	33/64	3 17/32	2 1/8	2.0118	0.7402	0.7402	0.5315	2.1890	7/16	NA 207-20	NFL 207	3.5
207-21	1 5/16																207-21		
207-22	1 3/8		161	130.2	21.5	14	36.5	13	90	53.8	51.1	18.8	18.8	13.5	55.6		207-22		
207																	207		
207-23	1 7/16																207-23		
NANFL 208-24	1 1/2	40	6 7/8	5 21/32	15/16	9/16	1 17/32	33/64	3 15/16	2 5/16	2.2165	0.8425	0.8425	0.5315	2.3740	7/16	NA 208-24	NFL 208	4.5
208-25	1 9/16																208-25		
208			175	143.7	24	14	39	13	100	58.9	56.3	21.4	21.4	13.5	60.3		208		
NANFL 209-26	1 5/8	45	7 13/32	5 27/32	15/16	9/16	1 9/16	19/32	4 1/4	2 5/16	2.2165	0.8425	0.8425	0.5315	2.5000	1/2	NA 209-26	NFL 209	5.2
209-27	1 11/16																209-27		
209-28	1 3/4		188	148.4	24	14	40	15	108	58.9	56.3	21.4	21.4	13.5	63.5		209-28		
209																	209		
NANFL 210-30	1 7/8	50	7 3/4	6 3/16	1 1/8	9/16	1 27/32	19/32	4 17/32	2 5/8	2.4685	0.9685	0.9685	0.5315	2.7520	1/2	NA 210-30	NFL 210	6.1
210-31	1 15/16																210-31		
210			197	157	28.5	14	46.5	15	115	66.6	62.7	24.6	24.6	13.5	69.9		210		
210-32	2 S																210-32		
NANFL 211-32	2	55	8 13/16	7 1/4	1 17/64	13/16	1 31/32	41/64	5 1/8	2 31/32	2.8110	1.0906	1.0906	0.6299	3.0000	9/16	NA 211-32	NFL 211	9.2
211-34	2 1/8																211-34		
211			224	184	32	20	50	16.3	130	75.7	71.4	27.7	27.7	16.0	76.2		211		
211-35	2 3/16																211-35		
NANFL 212-36	2 1/4	60	9 27/32	7 15/16	1 27/64	13/16	2 5/32	41/64	5 1/2	3 1/4	3.0630	1.2165	1.2165	0.6299	3.3150	9/16	NA 212-36	NFL 212	11.1
212																	212		
212-38	2 3/8		250	202	36	20	55	16.3	140	82.9	77.8	30.9	30.9	16.0	84.2		212-38		
212-39	2 1/2																212-39		

Interchange Page 95