


NAP PILLOW BLOCKS



Seal Options

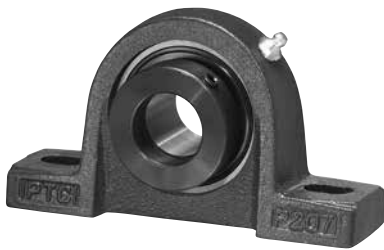

B-type





L3-type*

*Call for speed tolerances and available sizes

High shaft height with eccentric locking collar.

- » Cast iron housing
- » Wide inner race bearing

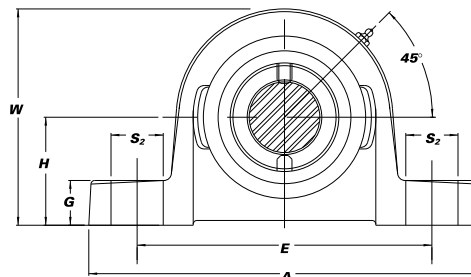

Unit No.	Shaft Dia. d (in.) (mm)	H	A	E	B	S ₂	S ₁	G	W	Bi	N	M	J	K	Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)
NAP 201	12															NAW201		
201-8	1/2															201-8		
202	15	1 3/16	4 7/8	3 5/8	1 7/16	3/4	7/16	1 1/32	2 23/64	1.4685	0.5472	0.5472	0.3740	1.1260	3/8	202	P 203	1.6
202-10	5/8	30.2	124	92	37	19	11	13	60	37.3	13.9	13.9	9.5	28.6		202-10		
203	17															203		
NAP 204-12	3/4	1 5/16	5	3 3/4	1 1/2	1 1/16	7/16	9/16	2 19/32	1.7126	0.6693	0.6693	0.3740	1.3110	3/8	NA 204-12	P 204	1.7
204	20	33.3	127	95	38	17	11	14	66	43.5	17.0	17.0	9.5	33.3		204		
NAP 205-14	7/8	1 7/16	5 1/2	4 1/8	1 1/2	1 1/16	1/2	5/8	2 27/32	1.7441	0.6850	0.6850	0.3740	1.5000	3/8	NA 205-14	P 205	2.1
205-15	1 5/16	36.5	140	105	38	17	13	16	72	44.3	17.4	17.4	9.5	38.1		205-15		
205	25															205		
205-16	1															205-16		
NAP 206-17	1 1/16	1 11/16*	6 5/16	4 3/4	1 3/4	1 3/16	9/16	1 1/16	3 19/64	1.9016	0.7165	0.7165	0.4685	1.7520	1/2	NA 206-17	P 206	3.1
206-18	1 1/8	42.9	160	121	44	21	14	18	84	48.3	18.2	18.2	11.9	44.5		206-18		
206	30															206		
206-19	1 3/16															206-19		
206-20	1 1/4															206-20		
NAP 207-20	1 1/4	1 7/8	6 17/32	5	1 29/32	7/8	9/16	3/4	3 11/16	2.0118	0.7402	0.7402	0.5315	2.1890	1/2	NA 207-20	P 207	4.2
207-21	1 5/16	47.6	166	127	48	22	14	19	94	51.1	18.8	18.8	13.5	55.6		207-21		
207-22	1 3/8															207-22		
207	35															207		
207-23	1 7/16															207-23		
NAP 208-24	1 1/2	1 15/16**	7 1/8	5 7/16	2	7/8	9/16	1 3/16	4	2.2165	0.8425	0.8425	0.5315	2.3740	1/2	NA 208-24	P 208	5.3
208-25	1 9/16	49.2	181	137	51	22	14	21	102	56.3	21.4	21.4	13.5	60.3		208-25		
208	40															208		
NAP 209-26	1 5/8	2 1/8	7 1/2	5 3/4	2 1/8	1 3/16	1 1/2	7/8	4 17/64	2.2165	0.8425	0.8425	0.5315	2.5000	1/2	NA 209-26	P 209	6.1
209-27	1 11/16	54.0	190	146	54	21	15	22	109	56.3	21.4	21.4	13.5	63.5		209-27		
209-28	1 3/4															209-28		
209	45															209		
NAP 210-30	1 7/8	2 1/4	8	6 1/4	2 1/4	1 5/16	2 3/32	1 5/16	4 33/64	2.4685	0.9685	0.9685	0.5315	2.7520	5/8	NA 210-30	P 210	7.2
210-31	1 15/16	57.2	203	159	57	24	18	24	115	62.7	24.6	24.6	13.5	69.9		210-31		
210	50															210		
210-32	2S															210-32		
NAP 211-32	2	2 1/2	8 5/8	6 7/8	2 3/8	1 5/16	2 3/32	1 1/16	5 1/32	2.8110	1.0905	1.0905	0.6300	3.0000	5/8	NA 211-32	P 211	9.4
211-34	2 1/8	63.5	220	174	60	24	18	27	128	71.4	27.7	27.7	16.0	76.2		211-34		
211	55															211		
211-35	2 3/16															211-35		
NAP 212-36	2 1/4	2 3/4	9 17/32	7 11/32	2 1/2	1	25/32	1 1/16	5 33/64	3.0630	1.2165	1.2165	0.6300	3.3150	5/8	NA 212-36	P 212	11.9
212	60	69.8	242	187	64	25.4	20	27	140	77.8	30.9	30.9	16.0	84.2		212		
212-38	2 3/8															212-38		
212-39	2 1/16															212-39		
NAP 213-40	2 1/2	3	10 3/4	8 1/8	2 11/16	1 3/16	1 3/16	1 1/8	6 1/32	3.3740	1.3425	1.3425	0.6890	3.3858	7/8	NA 213-40	P 213	14.0
213	65	76.2	273	206	68	30	20	28	153	85.7	34.1	34.1	17.5	86.0		213		
NAP 215-47	2 5/16	3 1/4	10 13/16	8 1/2	2 15/16	1 1/4	1	1 1/8	6 33/64	3.6260	1.4685	1.4685	0.6890	4.0157	7/8	NA 215-47	P 215	18.3
215	75	82.6	275	217	75	31	25.4	29	166	92.1	37.3	37.3	17.5	102.0		215		
215-48	3															215-48		

Interchange Page 95 *Also available 1 5/8" **Also available 2 1/8"