

NAT TAKE UP UNITS



Seal Options



B-type





L3-type*

*Call for speed tolerances and available sizes

Wide slot, eccentric locking collar.

- » Cast iron housing
- » Wide inner race bearing

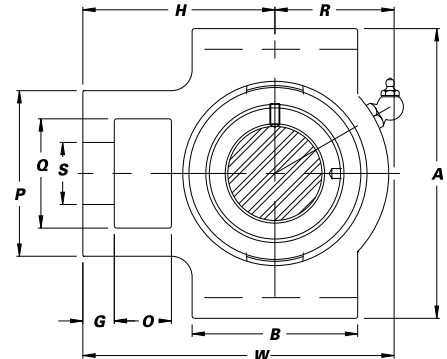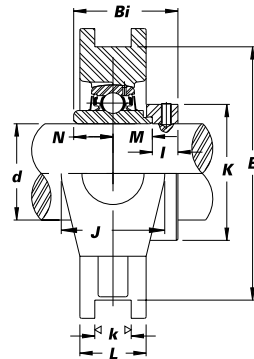

Unit No.	Shaft Dia.		Dimensions																			Bearing No.	Housing No.	Weight (lbs.)
	d	(in.) (mm)	(in.) (mm)																					
			O	G	P	Q	S	B	k	E	A	W	J	L	R	H	Bi	N	M	I	K			
NAT 201		12																				NA 201		
201-8	1/2																					201-8		
202		15	5/8	13/32	2	1 1/4	3/4	2	17/32	3	3 1/2	3 11/16	1 1/4	13/16	15/16	2 13/32	1.7126	0.6693	0.6693	0.3740	1.3110	202		
202-10	5/8																					202-10	T 204	1.8
203		17	16	10	51	32	19	51	13.5	76.2	89	94	32	21	33	61	43.5	17.0	17.0	9.5	33.3	203		
204-12	3/4																					204-12		
204		20																				204		
NAT 205-14	7/8																					NA 205-14		
205-15	15/16		5/8	13/32	2	1 1/4	3/4	2	17/32	3	3 1/2	3 13/16	1 1/4	15/16	1 3/8	2 1/16	1.7441	0.6850	0.6850	0.3740	1.5000	205-15		
205		25	16	10	51	32	19	51	13.5	76.2	89	97	32	24	35	62	44.3	17.4	17.4	9.5	38.1	205	T 205	2.0
205-16	1																					205-16		
NAT 206-17	1 1/16																					NA 206-17		
206-18	1 1/8																					206-18		
206		30	5/8	13/32	2 1/32	1 15/32	55/64	2 1/4	17/32	3 1/2	4 1/32	4 7/16	1 15/32	1 3/32	1 11/16	2 3/4	1.9016	0.7165	0.7165	0.4685	1.7520	206	T 206	3.1
206-19	1 3/16																					206-19		
206-20	1 1/4S																					206-20		
NAT 207-20	1 1/4																					NA 207-20		
207-21	1 5/16																					207-21		
207-22	1 3/8		5/8	1/2	2 17/32	1 15/32	55/64	2 17/32	17/32	3 1/2	4 1/32	5 3/32	1 15/32	1 3/16	2	3 1/16	2.0118	0.7402	0.7402	0.5315	2.1890	207-22		
207		35	16	13	64	37	22	64	13.5	88.9	102	129	37	30	51	78	51.1	18.8	18.8	13.5	55.6	207	T 207	4.0
207-23	1 7/16																					207-23		
NAT 208-24	1 1/2																					NA 208-24		
208-25	1 9/16		3/4	5/8	3 9/32	1 15/16	1 9/64	3 9/32	1 1/16	4	4 1/2	5 21/32	1 15/16	1 5/16	2 1/32	3 15/32	2.2165	0.8425	0.8425	0.5315	2.3740	208-25		
208		40	19	16	83	49	29	83	17.5	101.6	114	144	49	33	56	88	56.3	21.4	21.4	13.5	60.3	208	T 208	5.7
NAT 209-26	1 5/8																					NA 209-26		
209-27	1 11/16		3/4	5/8	3 9/32	1 15/16	1 9/64	3 9/32	1 1/16	4	4 19/32	5 21/32	1 15/16	1 3/8	2 1/4	3 1/16	2.2165	0.8425	0.8425	0.5315	2.5000	209-27		
209-28	1 3/4		19	16	83	49	29	83	17.5	101.6	117	144	49	35	57	87	56.3	21.4	21.4	13.5	63.5	209-28		
209		45																				209	T 209	5.7
NAT 210-30	1 7/8																					NA 210-30		
210-31	1 15/16		3/4	5/8	3 9/32	1 15/16	1 9/64	3 9/8	1 1/16	4	4 19/32	5 7/8	1 15/16	1 15/32	2 5/16	3 17/32	2.4685	0.9685	0.9685	0.5315	2.7520	210-31		
210		50	19	16	83	49	29	86	17.5	101.6	117	149	49	37	59	90	62.7	24.6	24.6	13.5	69.9	210	T 210	6.1
210-32	2S																					210-32		
NAT 211-32	2																					NA 211-32		
211-34	2 1/8		1	3/4	4 1/32	2 17/32	1 3/8	3 3/4	1 1/16	5 1/8	5 3/4	6 23/32	2 17/32	1 1/2	2 9/16	4 3/16	2.8110	1.0905	1.0905	0.6300	3.0000	211-34		
211		55	25	19	102	64	35	95	27	130.2	146	171	64	38	65	106	71.4	27.7	27.7	16.0	76.2	211	T 211	9.2
211-35	2 3/16																					211-35		
NAT 212-36	2 1/4																					NA 212-36		
212		60	1 1/4	3/4	4 1/32	2 17/32	1 3/8	4 1/32	1 1/16	5 1/8	5 3/4	7 5/8	2 17/32	2 15/16	4 11/16	3.0630	1.2165	1.2165	0.6300	3.3150	212			
212-38	2 3/8		32	19	102	64	35	102	27	130.2	146	194	64	42	75	119	77.8	30.9	30.9	16.0	84.2	212-38	T 212	11.3
212-39	2 1/16																					212-39		
NAT 213-40	2 1/2		1 1/4	13/16	4 3/8	2 3/4	1 39/64	4 3/4	1 1/16	5 15/16	6 9/16	8 13/16	2 3/4	1 23/32	3 1/16	5 13/32	3.3740	1.3425	1.3425	0.6890	3.3858	NA 213-40		
213		65	32	21	111	70	41	121	27	150.8	167	224	70	44	87	137	85.7	34.1	34.1	17.5	86.0	213	T 213	16.3
NAT 215-47	2 15/16																					NA 215-47		
215		75	1 1/4	13/16	4 3/8	2 3/4	1 39/64	4 3/4	1 1/16	5 15/16	6 9/16	9 1/8	2 3/4	1 7/8	3 5/8	5 1/2	3.6260	1.4685	1.4685	0.6890	4.0157	215		
215-48	3		32	21	111	70	41	121	27	150.8	167	232	70	48	92	140	92.1	37.3	37.3	17.5	102.0	215-48	T 215	17.3

Interchange Page 95