

SAPL PILLOW BLOCKS





Seal Options



Low shaft height with eccentric locking collar.

- » Cast iron housing
- » Narrow inner race bearing

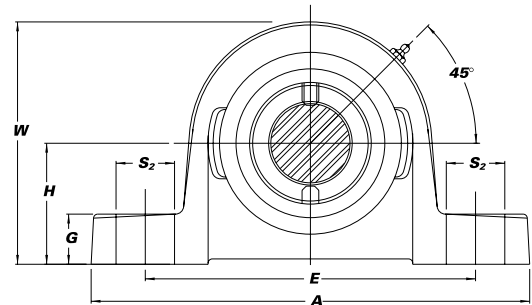

Unit No.	Shaft Dia.		Dimensions (in.) (mm)													Bolt Used	Bearing No.	Housing Weight (lbs.)	
	d	d	H	A	E	B	S ₂	S ₁	G	W	Bi	N	M	J	K				
SAPL 201		12															SA 201G		
201-8	1/2	15	1 1/16	4 7/8	3 5/8	1 7/16	3/4	7/16	1 7/32	2 15/64	1.1260	0.2559	0.4960	0.3740	1.1260	3/8	201-8G	PL 203	1.5
202			27	124	92	37	19	11	13	57	28.6	6.5	12.6	9.5	28.6		202G		
202-10	5/8	17															202-10G		
203																	203G		
SAPL 204-12	3/4	20	1 1/4	5	3 3/4	1 1/2	9/16	7/16	9/16	2 1/2	1.2205	0.2953	0.5512	0.3740	1.3110	3/8	SA 204-12G	PL 204	1.7
204			31.8	127	95	38	14	11	14	64	31.0	7.5	14.0	9.5	33.3		204G		
SAPL 205-14	7/8	25	1 5/16	5 1/2	4 1/8	1 1/2	1 1/16	7/16	5/8	2 45/64	1.2205	0.2953	0.5513	0.3740	1.5000	3/8	SA 205-14G		
205-15	15/16		33.3	140	105	38	18	11	16	69	31.0	7.5	14.0	9.5	38.1		205-15G	PL 205	2.0
205																	205G		
205-16	1																205-16G		
SAPL 206-17	1 1/16	30	1 9/16	6 1 1/32	4 3/4	1 3/4	1 3/16	9/16	1 1/16	3 5/32	1.4055	0.3543	0.5827	0.4685	1.7520	1/2	SA 206-17G		
206-18	1 1/8		39.7	161	121	45	21	14	18	80	35.7	9.0	14.8	11.9	44.5		206-18G	PL 206	3.0
206																	206G		
206-19	1 3/16																206-19G		
206-20	1 1/4S																206-20G		
SAPL 207-20	1 1/4	35	1 13/16	6 19/32	5	1 7/8	7/8	9/16	2 5/32	3 21/32	1.5315	0.3740	0.6260	0.5315	2.1890	1/2	SA 207-20G		
207-21	1 5/16		46.0	167	127	48	22	14	20	93	38.9	9.5	15.9	13.5	55.6		207-21G	PL 207	4.0
207-22	1 3/8																207-22G		
207																	207G		
207-23	1 7/16																207-23G		
SAPL 208-24	1 1/2	40	1 15/16	7 1/8	5 7/16	2	7/8	9/16	1 3/16	4	1.7205	0.4331	0.7559	0.5315	2.3740	1/2	SA 208-24G		
208-25	1 9/16		49.2	181	137	51	22	14	21	102	43.7	11.0	19.2	13.5	60.3		208-25G	P 208	5.0
208																	208G		
SAPL 209-26	1 5/8	45	2 1/16	7 1/2	5 3/4	2 1/8	1 3/16	9/16	2 9/32	4 7/32	1.7205	0.4331	0.7559	0.5315	2.5000	1/2	SA 209-26G		
209-27	1 11/16		52.4	191	146	54	20	14	23	107	43.7	11.0	19.2	13.5	63.5		209-27G	PL 209	6.1
209-28	1 3/4																209-28G		
209																	209G		
SAPL 210-30	1 7/8	50	2 3/16	8 1/32	6 1/4	2 1/4	1 5/16	1 1/16	2 9/32	4 29/64	1.7205	0.4331	0.7559	0.5315	2.7520	5/8	SA 210-30G		
210-31	1 15/16		55.6	204	159	57	24	18	23	113	43.7	11.0	19.2	13.5	69.9		210-31G	PL 210	6.7
210																	210G		
210-32	2S																210-32G		
SAPL 211-32	2	55	2 7/16	8 5/8	7	2 3/8	1 5/16	1 1/16	1	4 61/64	1.9055	0.4724	0.8031	0.6299	3.0000	5/8	SA 211-32G		
211-34	2 1/8		61.9	219	178	60	24	18	25.4	126	48.4	12.0	20.4	16.0	76.2		211-34G	PL 211	8.8
211																	211G		
211-35	2 3/16																211-35G		

Interchange Page 95