

SBLF & SALF 2-BOLT FLANGE UNITS




Seal Options



K-type

- » Cast iron housing
- » Round bolt holes
- » Narrow inner race bearing
- » Also available non-relubricatable — please specify

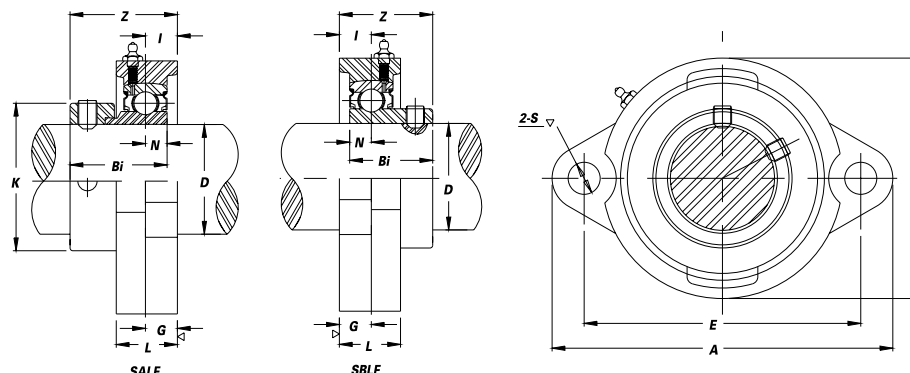

SBLF Set screw type

Unit No.	Shaft Dia. d		Dimensions (in.) (mm)										Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)
	(in.)	(mm)	A	E	I	G	L	S	B	Z	Bi	N				
SBLF 201-8G	1/2	15	3 3/16	2 1/2	3/8	3/8	2 3/32	5/16	2 7/32	1	0.8661	0.2362	1/4	SB 201-8G	LF 203G	0.6
202G														202G		
202-10G	5/8	17	81	63.5	10	10	18	8	56	25.4	22.0	6.0		202-10G		
203G														203G		
SBLF 204-12G	3/4	20	3 17/32	2 13/16	7/16	7/16	2 5/32	2 5/64	2 13/32	1 5/32	0.9843	0.2756	5/16	SB 204-12G	LF 204G	0.7
204G														204G		
SBLF 205-14G	7/8	25	3 3/4	2 63/64	7/16	7/16	2 5/32	2 5/64	2 17/32	1 3/16	1.0630	0.2953		SB 205-14G		
205G													5/16	205G	LF 205G	0.9
205-15G	1 5/16	95	95	76.0	11	11	20	10	64	30.5	27.0	7.5		205-15G		
205-16G	1													205-16G		
SBLF 206-17G	1 1/16	30	4 7/16	3 9/16	1 5/32	1 5/32	7/8	1 5/32	3	1 11/32	1.1811	0.3150	3/8	SB 206-17G	LF 206G	1.2
206-18G	1 1/8													206-18G		
206G														206G		
206-19G	1 3/16	113	113	90.5	12	12	23	12	76	34.0	30.0	8.0	3/8	206-19G	LF 206G	1.2
206-20G	1 1/4													206-20G		
SBLF 207-20G	1 1/4	35	4 13/16	3 15/16	3 3/64	3 3/64	1 5/16	1 5/32	3 1/2	1 7/16	1.2992	0.3740	3/8	SB 207-20G	LF 207G	1.7
207-21G	1 5/8													207-21G		
207-22G	1 3/8													207-22G		
207G														207G		
207-23G	1 7/16													207-23G		

SALF Eccentric locking collar type

Unit No.	Shaft Dia. d		Dimensions (in.) (mm)										Bolt Used (in.)	Bearing No.	Housing No.	Weight (lbs.)
	(in.)	(mm)	A	E	I	G	L	S	B	Z	Bi	N				
SALF 201-8G	1/2	15	3 3/16	2 1/2	3/8	3/8	2 3/32	5/16	2 7/32	1 1/4	1.1260	0.2362	1/4	SA 201-8G	LF 203G	0.7
202G														202G		
202-10G	5/8	17	81	63.5	10	10	18	8	56	31.8	28.6	6.0		202-10G		
203G														203G		
SALF 204-12G	3/4	20	3 17/32	2 13/16	7/16	7/16	2 5/32	2 5/64	2 13/32	1 23/64	1.2205	0.2953	5/16	SA 204-12G	LF 204G	0.8
204G														204G		
SALF 205-14G	7/8	25	3 3/4	2 63/64	7/16	7/16	2 5/32	2 5/64	2 17/32	1 23/64	1.2205	0.2953		SA 205-14G	LF 205G	1.0
205G													5/16	205G		
205-15G	1 5/16	95	95	76.0	11	11	20	10	64	34.4	31.0	7.5		205-15G		
205-16G	1													205-16G		
SALF 206-17G	1 1/16	30	4 7/16	3 9/16	1 5/32	1 5/32	7/8	1 5/32	3	1 17/32	1.4055	0.3543	3/8	SA 206-17G	LF 206G	1.4
206-18G	1 1/8													206-18G		
206G														206G		
206-19G	1 3/16	113	113	90.5	12	12	23	12	76	38.9	35.7	9.0	3/8	206-19G	LF 206G	1.4
206-20G	1 1/4													206-20G		
SALF 207-20G	1 1/4	35	4 13/16	3 15/16	3 3/64	3 3/64	1 5/16	1 5/32	3 1/2	1 11/16	1.5315	0.3740	3/8	SA 207-20G	LF 207G	2.0
207-21G	1 5/8													207-21G		
207-22G	1 3/8													207-22G		
207G														207G		
207-23G	1 7/16													207-23G		

G=Relubricatable Specify "N" for non-relubricatable units