

NICKEL PLATED 2-BOLT FLANGES




Seal Options



Optional bearing inserts: Stainless Steel-SUCNPFL Hard Chrome Coated-CUCNPFL

- » Available with locking collar bearings
- » Overview of corrosion resistant products – pg. 47-48

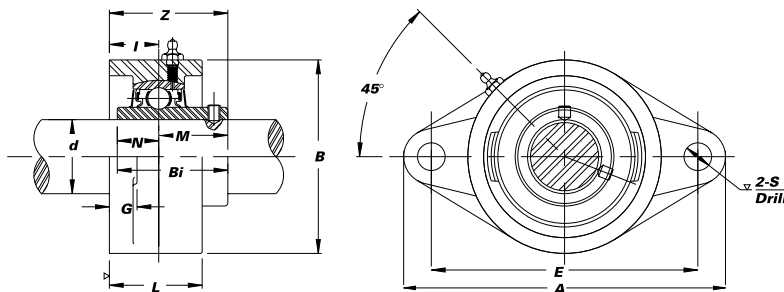

Unit No.	Shaft Dia.		Dimensions (in.) (mm)											Bolt Used	Bearing No.	Housing No.	Weight (lbs.)
	d		A	E	I	G	L	S	B	Z	Bi	N	M				
	(in.)	(mm)												(in.)			

SUCNPFL with Stainless Steel Bearing Inserts

SUCNPFL 201-8 202-10 204-12 204	1/2 5/8 3/4	20	47/16 113	317/32 89.7	19/32 15	7/16 11	1 25	25/64 10	23/8 60	15/16 33.3	1.2205 31.0	0.5000 12.7	0.7205 18.3	5/16	SUC 201-8 202-10 204-12 204	NPFL 204	1.0
SUCNPFL 205-14 205 205-16	7/8 1	25	51/8 130	357/64 98.8	5/8 16	1/2 13	11/16 27	15/32 11.9	211/16 68	115/32 37.3	1.3386 34.0	0.5630 14.3	0.7756 19.7	3/8	SUC 205-14 205 205-16	NPFL 205	1.5
SUCNPFL 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4 S	30	513/16 148	419/32 116.7	45/64 18	1/2 13	17/32 31	15/32 11.9	35/32 80	119/32 40.5	1.5000 38.1	0.6260 15.9	0.8740 22.2	3/8	SUC 206-18 206 206-19 206-20	NPFL 206	2.2
SUCNPFL 207-20 207-21 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	611/32 161	51/8 130.2	3/4 19	9/16 14	111/32 34	33/64 13	317/32 90	13/4 44.5	1.6890 42.9	0.6890 17.5	1.0000 25.4	7/16	SUC 207-20 207-21 207-22 207 207-23	NPFL 207	2.9
SUCNPFL 208-24 208	1 1/2	40	67/8 175	521/32 143.7	53/64 21	9/16 14	113/32 36	33/64 13	315/16 100	2 50.8	1.9370 49.2	0.7480 19.0	1.1890 30.2	7/16	SUC 208-24 208	NPFL 208	3.5
SUCNPFL 209-27 209-28 209	1 11/16 1 3/4	45	713/32 188	527/32 148.4	55/64 22	19/32 15	11/2 38	19/32 15	41/4 108	21/16 52.4	1.9370 49.2	0.7480 19.0	1.1890 30.2	1/2	SUC 209-27 209-28 209	NPFL 209	4.4
SUCNPFL 210-31 210 210-32	1 15/16 2S	50	73/4 197	63/16 157	55/64 22	19/32 15	19/16 40	19/32 15	417/32 115	25/32 54.8	2.0315 51.6	0.7480 19.0	1.2835 32.6	1/2	SUC 210-31 210 210-32	NPFL 210	5.1
SUCNPFL 211-32 211-35	2 2 3/16		813/16 224	71/4 184	63/64 25	23/32 18	111/16 43	41/64 16.3	51/8 130	25/16 58.7	2.1890 55.6	0.8740 22.2	1.3150 33.4	9/16	SUC 211-32 211-35	NPFL 211	7.3
SUCNPFL 212-36 212-39	2 1/4 2 7/16		927/32 250	715/16 201.6	19/64 29	23/32 18	17/8 48	41/64 16.3	51/2 140	223/32 69.1	2.5630 65.1	1.0000 25.4	1.5630 39.7	9/16	SUC 212-36 212-39	NPFL 212	9.5

CUCNPFL with Hard Chrome Coated Bearing Inserts

CUCNPFL 204-12 204	3/4	20	47/16 113	317/32 89.7	19/32 15	7/16 11	1 25	25/64 10	23/8 60	15/16 33.3	1.2205 31.0	0.5000 12.7	0.7205 18.3	5/16	CUC 204-12 204	NPFL 204	1.0
CUCNPFL 205-14 205 205-16	7/8 1	25	51/8 130	357/64 98.8	5/8 16	1/2 13	11/16 27	15/32 11.9	211/16 68	115/32 37.3	1.3386 34.0	0.5630 14.3	0.7756 19.7	3/8	CUC 205-14 205 205-16	NPFL 205	1.5
CUCNPFL 206-18 206 206-19 206-20	1 1/8 1 3/16 1 1/4 S	30	513/16 148	419/32 116.7	45/64 18	1/2 13	17/32 31	15/32 11.9	35/32 80	119/32 40.5	1.5000 38.1	0.6260 15.9	0.8740 22.2	3/8	CUC 206-18 206 206-19 206-20	NPFL 206	2.2
CUCNPFL 207-20 207-22 207 207-23	1 1/4 1 5/16 1 3/8 1 7/16	35	611/32 161	51/8 130.2	3/4 19	9/16 14	111/32 34	33/64 13	317/32 90	13/4 44.5	1.6890 42.9	0.6890 17.5	1.0000 25.4	7/16	CUC 207-20 207-22 207 207-23	NPFL 207	2.9
CUCNPFL 208-24 208	1 1/2	40	67/8 175	521/32 143.7	53/64 21	9/16 14	113/32 36	33/64 13	315/16 100	2 50.8	1.9370 49.2	0.7480 19.0	1.1890 30.2	7/16	CUC 208-24 208	NPFL 208	3.5
CUCNPFL 209-27 209-28 209	1 11/16 1 3/4	45	713/32 188	527/32 148.4	55/64 22	19/32 15	11/2 38	19/32 15	41/4 108	21/16 52.4	1.9370 49.2	0.7480 19.0	1.1890 30.2	1/2	CUC 209-27 209-28 209	NPFL 209	4.4
CUCNPFL 210-31 210 210-32	1 15/16 2S	50	73/4 197	63/16 157	55/64 22	19/32 15	19/16 40	19/32 15	417/32 115	25/32 54.8	2.0315 51.6	0.7480 19.0	1.2835 32.6	1/2	CUC 210-31 210 210-32	NPFL 210	5.1