



Seal Options



B-type




L3-type*

*Call for speed tolerances and available sizes

Narrow slot, set screw lock.

- » Cast iron housing
- » Wide inner race bearing

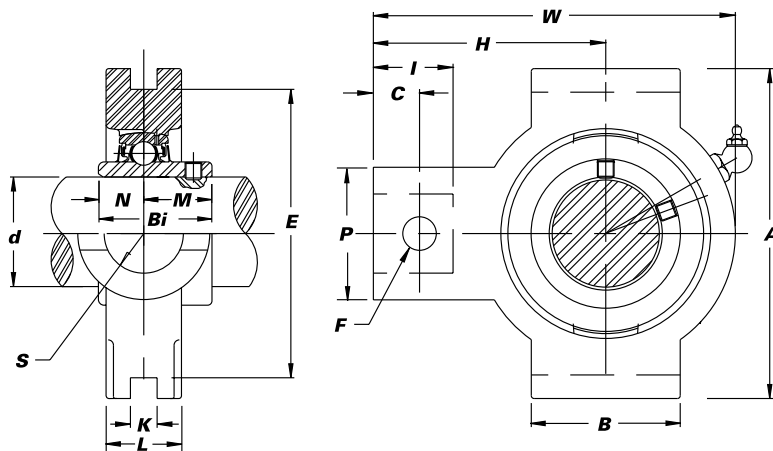

Unit No.	Shaft Dia. <i>d</i>		Dimensions (in.) (mm)															Bearing No.	Housing No.	Weight (lbs.)
	(in.)	(mm)	I	C	P	S	B	k	E	A	W	L	F	H	Bi	N	M			
UCTRS 201		12																UC 201		
201-8	1/2																	201-8		
202		15																202		
202-10	5/8		7/8	7/16	13/8	3/4	1 1/2	1/4	2 5/8	3 1/8	3 1/2	3/4	5/16	2 3/16	1.2205	0.5000	0.7205	202-10	TRS 204	1.7
203		17	22	11	35	19.1	38	6.4	66.7	79.4	89	19	8	56	31.0	12.7	18.3	203		
204-12	3/4																	204-12		
204		20																204		
UCTRS 205-14	7/8																	UC 205-14		
205-15	15/16																	205-15		
205		25	22	11	35	19.1	38	6.4	66.7	79.4	91	22	8	56	1.3386	0.5630	0.7756	205	TRS 205	1.9
205-16	1																	205-16		
UCTRS 206-17	1 1/16																	UC 206-17		
206-18	1 1/8																	206-18		
206		30	15/16	1/2	13/8	7/8	2 1/2	5/16	3 1/2	4 1/8	4 5/16	15/16	5/16	2 11/16	1.5000	0.6260	0.8740	206	TRS 206	2.9
206-19	1 3/16		24	13	35	22.2	64	7.9	88.9	105	110	24	8	68	38.1	15.9	22.2	206-19		
206-20	1 1/4																	206-20		
UCTRS 207-20	1 1/4																	UC 207-20		
207-21	1 5/16																	207-21		
207-22	1 3/8		15/16	1/2	13/8	7/8	2 1/2	5/16	3 1/2	4 1/8	4 1/2	1	5/16	2 11/16	1.6890	0.6890	1.0000	207-22	TRS 207	3.5
207		35	24	13	35	22.2	64	7.9	88.9	105	114	25	8	68	42.9	17.5	25.4	207		
207-23	1 7/16																	207-23		
UCTRS 208-24	1 1/2																	UC 208-24		
208-25	1 9/16																	208-25		
208		40	1 5/32	2 1/32	1 5/8	1 1/8	3	5/16	4	4 3/4	5 3/8	1 3/16	3/8	3 1/4	1.9370	0.7480	1.1890	208	TRS 208	5.5