


14M HTD TIMING PULLEY DIMENSIONS

The Timing Pulleys listed below are all stock sizes.
The figure following the type sketch letter in the "Type" column indicates the construction: (1-Solid, 2-Web, 3-Spoked), and the letter F indicates the sprocket has flanges.

For 14M HTD Timing Belts.

See page 131.

Order QD bushings separately
Stock Bushings Located
on Pages 84-85.

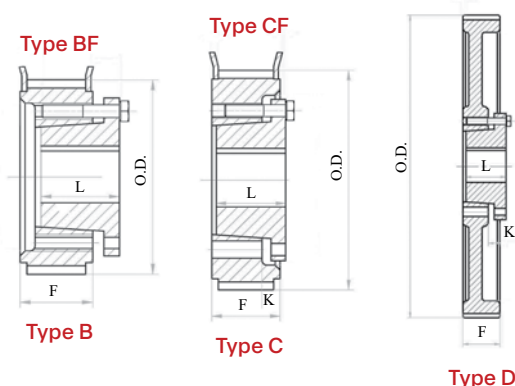

For belts 55MM wide * 14MM Pitch * Face Width (F) = 2 3/4"												
Part No.	No. of Teeth	Pitch Dia.	O.D.		Bore	Type	Dimensions			Max. Bore No Keyway	Max. Bore Std. Keyway	Wt.
			Pulley	Flange			L	H	K			
*P28-14M-55-SK	28	4.91	4.81	5.55	SK	B1F	1.94	-	-	2 5/8	2 1/2	6.14
*P29-14M-55-SK	29	5.09	4.98	5.55	SK	B1F	1.94	-	-	2 5/8	2 1/2	6.75
+P30-14M-55-SK	30	5.26	5.16	6.10	SK	C1F	1.94	-	0.75	2 5/8	2 1/2	7.07
+P32-14M-55-SK	32	5.61	5.51	6.10	SK	C1F	1.94	-	0.75	2 5/8	2 1/2	7.81
+P34-14M-55-SK	34	5.97	5.86	6.50	SK	C1F	1.94	-	0.75	2 5/8	2 1/2	9.04
+P36-14M-55-SF	36	6.32	6.21	6.81	SF	C1F	2.06	-	0.75	2 15/16	2 7/8	9.36
P38-14M-55-SF	38	6.67	6.56	7.21	SF	C1F	2.06	-	0.75	2 15/16	2 7/8	10.55
P40-14M-55-SF	40	7.02	6.91	7.52	SF	C1F	2.06	-	0.75	2 15/16	2 7/8	12.01
P44-14M-55-E	44	7.72	7.61	8.23	E	C1F	2.75	-	0.56	-	3 1/2	13.80
P48-14M-55-E	48	8.42	8.31	8.90	E	C1F	2.75	-	0.56	-	3 1/2	17.71
P52-14M-55-E	52	9.12	9.01	9.61	E	C1F	2.75	-	0.56	-	3 1/2	20.86
P56-14M-55-E	56	9.83	9.72	10.39	E	C1F	2.75	-	0.56	-	3 1/2	24.19
P60-14M-55-E	60	10.53	10.42	11.14	E	C1F	2.75	-	0.56	-	3 1/2	27.91
P64-14M-55-F	64	11.23	11.12	11.73	F	C1F	3.75	-	0.13	4	3 15/16	37.14
P68-14M-55-F	68	11.93	11.82	12.48	F	C1F	3.75	-	0.13	4	3 15/16	33.38
P72-14M-55-F	72	12.63	12.52	13.19	F	C1F	3.75	-	0.13	4	3 15/16	33.24
P80-14M-55-F	80	14.04	13.93	14.65	F	C1F	3.75	-	0.13	4	3 15/16	36.80
P90-14M-55-F	90	15.82	15.68	-	F	D2	3.75	-	0.13	4	3 15/16	39.60
P112-14M-55-F	112	19.65	19.54	-	F	D3	3.75	-	0.13	4	3 15/16	52.34

* = Can only be mounted from one direction

+ = Includes cap screws to be used in place of the ones that come with the bushing