


EPDM Elements

Dimensions

Part#	Coupling Size	D (Inches)	W (Inches)	Wt. (lbs.)
3JE	3	1 7/8	1	0.06
3JES	3	1 7/8	1	0.06
4JE	4	2 5/16	1 1/4	0.10
4JES	4	2 5/16	1 1/4	0.10
4E	4	2 5/16	1 1/4	0.10
5JE	5	2 15/16	1 9/16	0.20
5JES	5	2 15/16	1 9/16	0.20
5E	5	2 15/16	1 9/16	0.20
6JE	6	3 3/4	1 7/8	0.40
6JES	6	3 3/4	1 7/8	0.40
6E	6	3 3/4	1 7/8	0.40
7JE	7	4 11/32	2 3/16	0.62
7JES	7	4 11/32	2 3/16	0.62
7E	7	4 11/32	2 3/16	0.62
8JE	8	5 1/16	2 1/2	1.13
8JES	8	5 1/16	2 1/2	1.13
8E	8	5 1/16	2 1/2	1.13
9JE	9	6	3	1.46
9JES	9	6	3	1.46
9E	9	6	3	1.46

Part#	Coupling Size	D (Inches)	W (Inches)	Wt. (lbs.)
10JE	10	7 1/16	3 7/16	2.32
10JES	10	7 1/16	3 7/16	2.32
10E	10	7 1/16	3 7/16	2.32
11E	11	8 3/16	4	5.10
12E	12	9 9/16	4 11/16	8.10
13E	13	11 3/16	5 1/2	13.00
14E	14	13 3/32	6 1/2	21.10

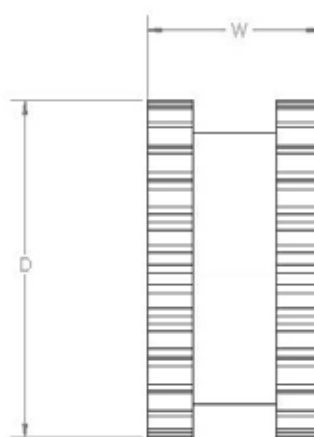

Coupling Ratings & Misalignment

Flange Size	EPDM Sleeves	Max. RPM	HP Per 100 RPM					Torque (in. lbs.)	Stiffness (in. lbs./rad)	Allow. Misalignment (inches)	
			Service Factor							Parallel	Angular
			1.0	1.5	2.0	2.5	3.0				
3	JE, JES	9200	0.1	0.07	0.05	0.04	0.03	60	229	0.010	0.035
4	E, JE, JES	7600	0.2	0.13	0.1	0.08	0.07	120	458	0.010	0.043
5	E, JE, JES	7600	0.5	0.33	0.25	0.2	0.17	240	916	0.015	0.056
6	E, JE, JES	6000	0.9	0.6	0.45	0.36	0.3	450	1718	0.015	0.070
7	E, JE, JES	5250	1.5	1	0.75	0.6	0.5	725	2769	0.020	0.081
8	E, JE, JES	4500	2.3	1.53	1.15	0.92	0.77	1135	4335	0.020	0.094
9	E, JE, JES	3750	3.7	2.47	1.85	1.48	1.23	1800	6875	0.025	0.109
10	E, JE, JES	3600	5.9	3.93	2.95	2.36	1.97	2875	10980	0.025	0.128
11	E	3600	9.3	6.2	4.65	3.72	3.1	5890	17300	0.032	0.151
12	E	2800	15	10	7.5	6	5	9360	27500	0.032	0.175
13	E	2400	23	15.33	11.5	9.2	7.67	14750	43350	0.040	0.195
14	E	2200	37	24.67	18.5	14.8	12.33	23400	68755	0.045	0.242