


**Cast Iron Sheaves - Light Duty**  
 Bored-to Size  
 for 3L, 4L or A Belts.  
 See pages 100-103

Order part number size + bore  
 Example: AKS42-1/2



Accurately machined from gray cast iron  
 Statically balanced, painted and individually  
 packaged

Furnished with standard keyway & 2 set screws  
 All set screws are 5/16-18 knurled with a  
 recommended tightening torque of 110-130 in-lbs.

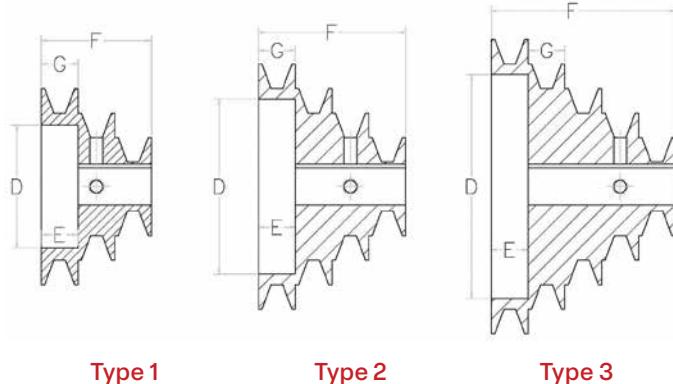

Type 1

Type 2

Type 3

Part No.	Type	Outside Diameters	Stock Bores	Dimensions (Inches)				Wt.
				D	G	F	E	
<b>AKS62</b>	3	6" 5" 4" 3" 2"	1/2-5/8-3/4-7/8	4 9/16	3/4	3 3/4	3/4	8.0
<b>AKS63</b>	2	6" 5" 4" 3"	1/2-5/8-3/4-7/8-1-1 1/8	4 9/16	3/4	3	3/4	7.5
<b>AKS64</b>	1	6" 5" 4"	1/2-5/8-3/4-7/8-1-1 1/8	4 9/16	3/4	2 1/4	3/4	6.5
<b>AKS52</b>	2	5" 4" 3" 2"	1/2-5/8-3/4-7/8	3 9/16	3/4	3	3/4	4.5
<b>AKS53</b>	1	5" 4" 3"	1/2-5/8-3/4-7/8-1-1 1/8	3 9/16	3/4	2 1/4	3/4	4.2
<b>AKS42</b>	1	4" 3" 2"	1/2-5/8-3/4-7/8	2 1/2	3/4	2 1/4	3/4	2.3

Standard Key Dimensions	
Shaft Dia.	Keyseat W x D
1/2 5/8 - 7/8 15/16 - 1 1/4	None 3/16 x 3/32 1/4 x 1/8