


Cast Iron Sheaves - Light Duty
Bored-to Size,
One Groove and Two Groove
1VP and 2VP Dimensions



VP

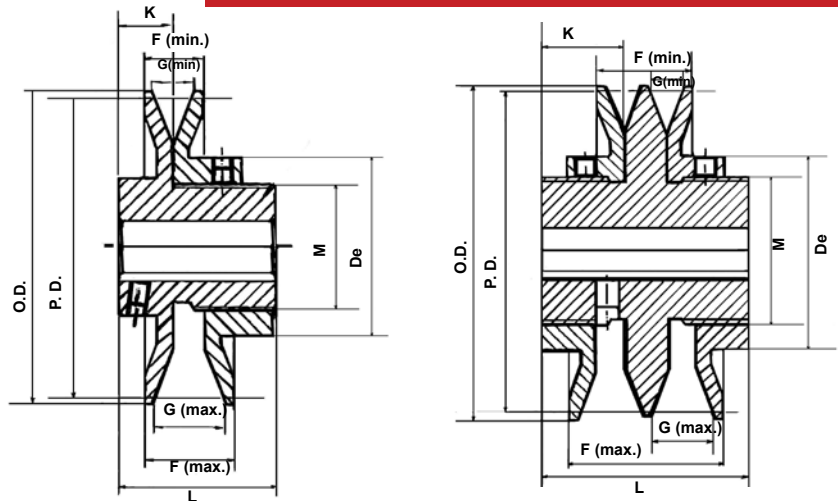

1VP Sheaves may be used with 3L, 4L, 5L, A, B and 5V Belts. See pages 100-108 & 113.

Part No.	O.D.	F		G		L	K	Bore	M	De	Avg. Wt.
		Max	Min	Max	Min						
1VP25	2.380	0.810	0.560	0.630	0.380	1.590	0.620	1/2, 5/8, 3/4	1.375	2.00	1.0
1VP30	2.870	0.810	0.560	0.630	0.380	1.660	0.630	1/2, 5/8, 3/4	1.500	2.13	1.4
1VP34	3.150	1.000	0.690	0.810	0.500	1.880	0.780	1/2, 5/8, 3/4, 7/8, 1, 1 1/8	1.500	2.13	1.5
1VP40	3.750	1.060	0.690	0.880	0.500	1.880	0.660	1/2, 5/8, 3/4,	1.750	2.38	1.7
								7/8, 1, 1 1/8	1.500	2.13	2.0
1VP44	4.150	1.060	0.690	0.880	0.500	1.880	0.660	1/2, 5/8, 3/4,	1.750	2.38	2.0
								7/8, 1, 1 1/8	1.500	2.13	2.2
1VP50	4.750	1.060	0.690	0.880	0.500	2.000	0.780	1/2, 5/8, 3/4,	1.750	2.38	2.2
								7/8, 1, 1 1/8	1.500	2.13	2.7
1VP56	5.350	1.060	0.690	0.880	0.500	2.000	0.780	1/2, 5/8, 3/4, 7/8, 1, 1 1/8	1.750	2.38	2.8
1VP60	6.000	1.250	0.880	1.031	0.660	2.160	0.850	5/8, 3/4, 7/8, 1, 1 1/8,	2.000	2.62	4.6
								1 3/8, 1 5/8	2.500	3.29	5.3
1VP62	5.950	1.250	0.880	1.031	0.660	2.000	0.780	5/8, 3/4, 7/8, 1, 1 1/8,	2.000	2.62	4.6
								1 1/4, 1 3/8	2.500	3.29	5.1
1VP65	6.500	1.250	0.880	1.030	0.660	2.160	0.850	3/4, 7/8, 1 1/8,	2.000	2.62	5.3
								1 3/8	2.500	3.29	5.8
1VP68	6.550	1.250	0.880	1.030	0.660	2.000	0.780	5/8, 3/4, 7/8, 1, 1 1/8,	2.000	2.62	5.2
								1 1/4, 1 3/8	2.500	3.29	5.8
1VP71	7.100	1.250	0.880	1.030	0.660	2.160	0.850	3/4, 7/8, 1 1/8,	2.000	2.62	6.5
								1 3/8, 1 5/8	2.500	3.29	6.8
1VP75	7.500	1.250	0.880	1.030	0.660	2.160	0.850	3/4, 7/8, 1 1/8,	2.000	2.62	7.0
								1 3/8, 1 5/8	2.500	3.29	7.6

2VP Sheaves may be used with 3L, 4L, 5L, A, B and 5V Belts. See pages 100-108 & 113.

Part No.	O.D.	F		G		L	K	Bore	M	De	Avg. Wt.
		Max	Min	Max	Min						
2VP36	3.350	2.000	1.380	0.810	0.500	3.000	1.190	1/2, 5/8, 3/4, 7/8, 1, 1 1/8	2.000	2.62	3.8
2VP42	3.950	2.130	1.380	0.880	0.500	3.000	1.190	5/8, 3/4, 7/8, 1, 1 1/8	2.000	2.62	4.7
2VP50	4.750	2.130	1.380	0.880	0.500	3.000	1.190	5/8, 3/4, 7/8, 1, 1 1/8	2.125	2.75	6.3
2VP56	5.350	2.130	1.380	0.880	0.500	3.000	1.190	5/8, 3/4, 7/8, 1, 1 1/8,	2.125	2.75	7.7
								1 3/8, 1 5/8	2.500	3.29	8.0
2VP60	6.000	2.380	1.630	1.030	0.660	3.250	1.250	3/4, 7/8, 1, 1 1/8,	2.125	2.75	9.8
								1 3/8, 1 5/8	2.500	3.29	9.8
2VP62	5.950	2.380	1.630	1.030	0.660	3.000	1.190	3/4, 7/8, 1, 1 1/8,	2.125	2.75	9.0
								1 3/8, 1 5/8	2.500	3.29	9.4
2VP65	6.500	2.380	1.630	1.030	0.660	3.250	1.250	3/4, 7/8, 1 1/8,	2.125	2.75	11.0
								1 3/8, 1 5/8	2.500	3.29	12.2
2VP68	6.550	2.380	1.630	1.030	0.660	3.000	1.190	3/4, 7/8, 1, 1 1/8,	2.125	2.75	10.4
								1 1/4, 1 3/8, 1 5/8	2.500	3.29	10.9
2VP71	7.100	2.380	1.630	1.030	0.660	3.250	1.250	3/4, 7/8, 1 1/8,	2.125	2.75	13.4
								1 3/8, 1 5/8	2.500	3.29	14.3
2VP75	7.500	2.380	1.630	1.030	0.660	3.250	1.250	3/4, 7/8, 1 1/8,	2.125	2.75	14.6
								1 3/8, 1 5/8	2.500	3.29	15.0

All 1VP & 2VP sheaves are furnished with standard keyway and (2) 5/16-18 knurled setscrews over each slot & in bore.