


NICKEL PLATED PILLOW BLOCKS





Seal Options

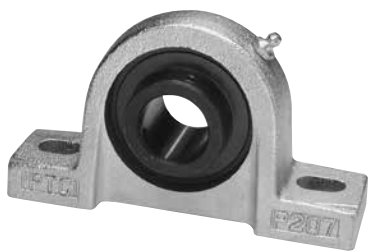

B-type

Black Oxide bearing inserts: BUCNPP.

- » High Shaft Height
- » Overview of corrosion resistant products – pg. 47-48

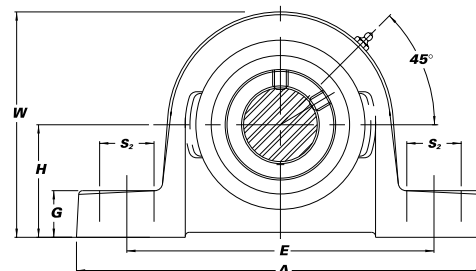

Unit No.	Shaft Dia.		Dimensions (in.) (mm)											Bolt Used	Bearing No.	Housing No.	Weight (lbs.)
	d		H	A	E	B	S ₂	S ₁	G	W	B _i	N	M				
	(in.)	(mm)															
BUCNPP 201-8 202-10	1/2 5/8		13/16 30.2	47/8 124	35/8 92	17/16 37	3/4 19	7/16 11	17/32 13	223/64 60	1.0236 26.0	0.3937 10.0	0.6299 16.0	3/8	BUCW 201-8 202-10	NPP 203	1.5
BUCNPP 204-12 204	3/4	20	15/16 33.3	5 127	33/4 95	11/2 38	111/16 17	7/16 11	9/16 14	219/32 66	1.2205 31.0	0.5000 12.7	0.7205 18.3	3/8	BUC 204-12 204	NPP 204	1.6
BUCNPP 205-14 205 205-16	7/8 1	25	17/16 36.5	51/2 140	41/8 105	11/2 38	111/16 17	1/2 13	5/8 16	227/32 72	1.3386 34.0	0.5630 14.3	0.7756 19.7	3/8	BUC 205-14 205 205-16	NPP 205	2.0
BUCNPP 206-18 206 206-19 206-20	11/8 13/16 11/4S	30	111/16*1 42.9	65/16 160	43/4 121	13/4 44	13/16 21	9/16 14	11/16 18	319/64 84	1.5000 38.1	0.6260 15.9	0.8740 22.2	1/2	BUC 206-18 206 206-19 206-20	NPP 206	3.0
BUCNPP 207-20 207-22 207 207-23	11/4 13/8 17/16	35	17/8 47.6	617/32 166	5 127	129/32 48	7/8 22	9/16 14	3/4 19	311/16 94	1.6890 42.9	0.6890 17.5	1.0000 25.4	1/2	BUC 207-20 207-22 207 207-23	NPP 207	4.0
BUCNPP 208-24 208	11/2	40	115/16*2 49.2	71/8 181	57/16 137	2 51	7/8 22	9/16 14	13/16 21	4 102	1.9370 49.2	0.7480 19.0	1.1890 30.2	1/2	BUC 208-24 208	NPP 208	5.0
BUCNPP 209-26 209-27 209-28 209	15/8 111/16 13/4 209	45	21/8 54.0	71/2 190	53/4 146	21/8 54	13/16 21	19/32 15	7/8 22	417/64 109	1.9370 49.2	0.7480 19.0	1.1890 30.2	1/2	BUC 209-26 209-27 209-28 209	NPP 209	5.7
BUCNPP 210-30 210-31 210 210-32	17/8 115/16 2S	50	21/4 57.2	8 203	61/4 159	21/4 57	15/16 24	23/32 18	15/16 24	433/64 115	2.0315 51.6	0.7480 19.0	1.2835 32.6	5/8	BUC 210-30 210-31 210 210-32	NPP 210	6.8
BUCNPP 211-32 211 211-35	2 211 235/16	55	21/2 63.5	85/8 220	67/8 174	23/8 60	15/16 24	23/32 18	11/16 27	51/32 128	2.1890 55.6	0.8740 22.2	1.3150 33.4	5/8	BUC 211-32 211 211-35	NPP 211	8.8
BUCNPP 212-36 212 212-39	21/4 212 212-39	60	23/4 69.8	917/32 242	711/32 187	21/2 64	1 25.4	25/32 20	11/16 27	533/64 140	2.5630 65.1	1.0000 25.4	1.5630 39.7	5/8	BUC 212-36 212 212-39	NPP 212	11.2
BUCNPP 213-40	21/2		3 76.2	103/4 273	81/8 206	211/16 68	13/16 30	13/16 20	11/8 28	61/32 153	2.5630 65.1	1.0000 25.4	1.5630 39.7	7/8	BUC 213-40	NPP 213	14.1
BUCNPP 215-47 215-48 215-48	215/16 3		31/4 82.6	1013/16 275	81/2 217	215/16 217	11/4 75	1 25.4	11/8 29	633/64 166	3.0630 77.8	1.3110 33.3	1.7520 44.5	7/8	BUC 215-47 215-48 215-48	NPP 215	17.0

*1 Also available 1 5/8"

*2 Also available 2 1/8"