

NICKEL PLATED PILLOW BLOCKS





Seal Options



- » High shaft height
- » Available with locking collar bearings
- » Overview of corrosion resistant products – pg. 47-48

Optional bearing inserts: Stainless Steel-SUCNPP Hard Chrome Coated-CUCNPP

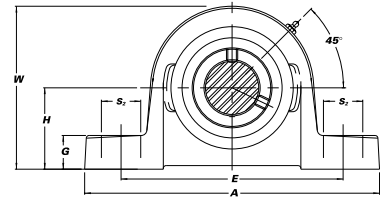

Unit No.	Shaft Dia.		Dimensions (in.)										Bolt Used	Bearing No.	Housing No.	Weight (lbs.)
	d	d	H	A	E	B	S ₂	S ₁	G	W	Bi	N	M			
	(in.)	(mm)											(in.)			
SUCNPP with Stainless Steel Bearing Inserts																
SUCNPP 201-8	1/2													SUC 201-8		
202-10	5/8		15/16	5	3/4	1 1/2	11/16	7/16	9/16	2 19/32	1.2205	0.5000	0.7205	3/8	NPP 204	1.6
204-12	3/4		33.3	127	95	38	17	11	14	66	31.0	12.7	18.3			
204		20														
SUCNPP 205-14	7/8													SUC 205-14		
205		25	1 1/16	5 1/2	4 1/8	1 1/2	11/16	1/2	5/8	2 27/32	1.3386	0.5630	0.7756	3/8	NPP 205	2.0
205-16	1		36.5	140	105	38	17	13	16	72	34.0	14.3	19.7			
SUCNPP 206-18	1 1/8													SUC 206-18		
206		30	1 11/16 *	6 5/16	4 3/4	1 3/4	13/16	9/16	11/16	3 19/64	1.5000	0.6260	0.8740	1/2	NPP 206	3.0
206-19	1 3/16		42.9	160	121	44	21	14	18	84	38.1	15.9	22.2			
206-20	1 1/4 S															
SUCNPP 207-20	1 1/4													SUC 207-20		
207-21	1 5/16													SUC 207-21		
207-22	1 3/8		1 7/8	6 17/32	5	1 29/32	7/8	9/16	3/4	3 11/16	1.6890	0.6890	1.0000	1/2	NPP 207	4.0
207		35	47.6	166	127	48	22	14	19	94	42.9	17.5	25.4			
207-23	1 7/16													SUC 207-23		
SUCNPP 208-24	1 1/2													SUC 208-24		
208		40	1 15/16 *	7 1/8	5 7/16	2	7/8	9/16	13/16	4	1.9370	0.7480	1.1890	1/2	NPP 208	5.0
			49.2	181	137	51	22	14	21	102	49.2	19.0	30.2			
SUCNPP 209-27	1 11/16													SUC 209-27		
209-28	1 3/4		2 1/8	7 1/2	5 3/4	2 1/8	13/16	19/32	7/8	4 17/64	1.9370	0.7480	1.1890	1/2	NPP 209	5.7
209		45	54.0	190	146	54	21	15	22	109	49.2	19.0	30.2			
SUCNPP 210-31	1 15/16													SUC 210-31		
210		50	2 1/4	8	6 1/4	2 1/4	15/16	23/32	15/16	4 33/64	2.0315	0.7480	1.2835	5/8	NPP 210	6.8
210-32	2 S		57.2	203	159	57	24	18	24	115	51.6	19.0	32.6			
SUCNPP 211-32	2													SUC 211-32		
211-35	2 3/16		2 1/2	8 5/8	6 7/8	2 5/8	15/16	23/32	1 1/16	5 1/32	2.1890	0.8740	1.3150	5/8	NPP 211	8.8
			63.5	220	174	60	24	18	27	128	55.6	22.2	33.4			
SUCNPP 212-36	2 1/4													SUC 212-36		
212-39	2 1/16		2 3/4	9 17/32	7 11/32	2 1/2	1	25/32	1 1/16	5 33/64	2.5630	1.0000	1.5630	5/8	NPP 212	11.2
			69.8	242	187	64	25.4	20	27	140	65.1	25.4	39.7			
CUCNPP with Hard Chrome Coated Bearing Inserts																
CUCNPP 204-12	3/4													CUC 204-12		
204		20	15/16	5	3/4	1 1/2	11/16	7/16	9/16	2 19/32	1.2205	0.5000	0.7205	3/8	NPP 204	1.6
			33.3	127	95	38	17	11	14	66	31.0	12.7	18.3			
CUCNPP 205-14	7/8													CUC 205-14		
205		25	1 1/16	5 1/2	4 1/8	1 1/2	11/16	1/2	5/8	2 27/32	1.3386	0.5630	0.7756	3/8	NPP 205	2.0
205-16	1		36.5	140	105	38	17	13	16	72	34.0	14.3	19.7			
CUCNPP 206-18	1 1/8													CUC 206-18		
206		30	1 11/16 *	6 5/16	4 3/4	1 3/4	13/16	9/16	11/16	3 19/64	1.5000	0.6260	0.8740	1/2	NPP 206	3.0
206-19	1 3/16		42.9	160	121	44	21	14	18	84	38.1	15.9	22.2			
206-20	1 1/4 S															
CUCNPP 207-20	1 1/4													CUC 207-20		
207-22	1 3/8		1 7/8	6 17/32	5	1 29/32	7/8	9/16	3/4	3 11/16	1.6890	0.6890	1.0000	1/2	NPP 207	4.0
207		35	47.6	166	127	48	22	14	19	94	42.9	17.5	25.4			
207-23	1 7/16													SUC 207-23		
CUCNPP 208-24	1 1/2													CUC 208-24		
208		40	1 15/16 *	7 1/8	5 7/16	2	7/8	9/16	13/16	4	1.9370	0.7480	1.1890	1/2	NPP 208	5.0
			49.2	181	137	51	22	14	21	102	49.2	19.0	30.2			
CUCNPP 209-27	1 11/16													CUC 209-27		
209-28	1 3/4		2 1/8	7 1/2	5 3/4	2 1/8	13/16	19/32	7/8	4 17/64	1.9370	0.7480	1.1890	1/2	NPP 209	5.7
209		45	54.0	190	146	54	21	15	22	109	49.2	19.0	30.2			
CUCNPP 210-31	1 15/16													CUC 210-31		
210		50	2 1/4	8	6 1/4	2 1/4	15/16	23/32	15/16	4 33/64	2.0315	0.7480	1.2835	5/8	NPP 210	6.8
210-32	2 S		57.2	203	159	57	24	18	24	115	51.6	19.0	32.6			
CUCNPP 211-32	2													CUC 211-32		
211-35	2 3/16		2 1/2	8 5/8	6 7/8	2 5/8	15/16	23/32	1 1/16	5 1/32	2.1890	0.8740	1.3150	5/8	NPP 211	8.8
			63.5	220	174	60	24	18	27	128	55.6	22.2	33.4			
CUCNPP 212-36	2 1/4													CUC 212-36		
212-39	2 1/16		2 3/4	9 17/32	7 11/32	2 1/2	1	25/32	1 1/16	5 33/64	2.5630	1.0000	1.5630	5/8	NPP 212	11.2
			69.8	242	187	64	25.4	20	27	140	65.1	25.4	39.7			
CUCNPP 213-40	2 1/2		3	10 3/4	8 1/8	2 11/16	13/16	13/16	1 1/8	6 1/32	2.5630	1.0000	1.5630	7/8	NPP 213	14.1
			76.2	273	206	68	30	20	28	153	65.1	25.4	39.7			
CUCNPP 215-47	2 15/16		3 1/4	10 13/16	8 1/2	2 15/16	1 1/4	1	1 1/8	6 33/64	3.0630	1.3110	1.7520	7/8	NPP 215	17.0
215-48	3		82.6	275	217	75	31	25.4	29	166	77.8	33.3	44.5			

*1 Also available 1 5/8" *2 Also available 2 1/8"